


HIKARI® 富山

HSAT-K1A

自动下摆机

AUTOMATIC HEMMING MACHINE

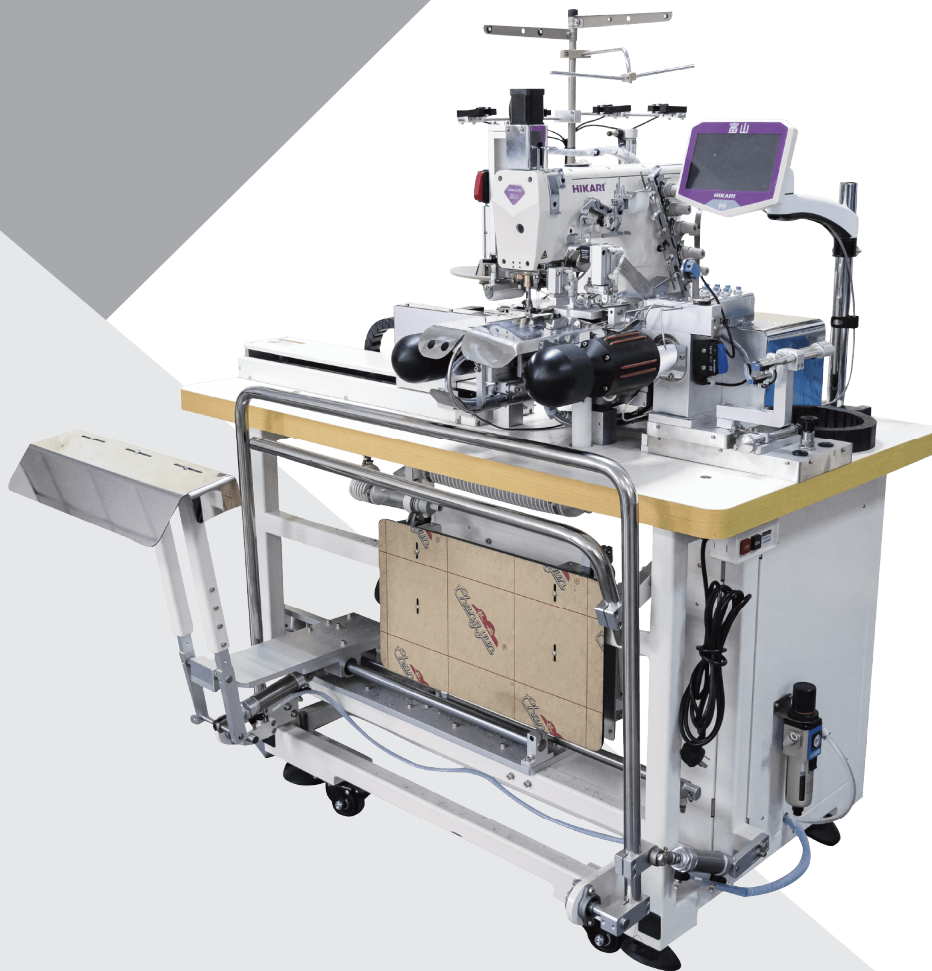

稳定 高效

Stable and efficient



痛点VS价值买点

PAIN POINTS VS BUY POINTS

- 01 **产能高效：一人操控2台，单台效率2000—2500件/10小时**
High productivity: one person controls 2 units, single unit efficiency 2000-2500 pieces /10 hours.
- 02 **新人上手快：降低员工对缝纫技能的依赖，只放料，自动缝制**
Easy for novices to operate, Reduce operator dependence on sewing skill, only unload material, automatic sewing.
- 03 **压脚压力自动感应升降功能：替代机械调整，快捷，精准**
Presser foot pressure automatic induction lifting function: replace mechanical adjustment, fast and accurate
- 04 **一件换款功能：每款参数自动储存，提高换款效率**
One click change style: Each parameter is automatically stored to improve the efficiency of exchange.

尚有价值魅力

MORE VALUES

自动倒股功能，满足高品质工艺需求

Automatic flat banding function to meet the needs of high quality process

混码自动识别，混码缝制，快捷高效

Mixed size automatic identify, mixed size sewing, fast and efficient

光眼感应自动启缝，自动断线检测功能、自动计件功能、自动收料功能

Sewing start by sensor, automatic thread breakage detection, automatic piece account function, automatic collection function

自动抬压脚时同步剪线吸尘



Left presser foot and trimming suction on same time.

锁缝功能,防止脱线（选配）

Locking stitch function to avoid skip stitch (optional)

配置富山IoT功能，实现设备网络联接功能，助力企业打造数字化工厂

Configure HIKARI IOT functions. Implement device network connection function. Help customer build digital factories.



HSAT-K1A	UY128GA	3	5	5.6	4.5	0.8-1.8	7mm	T袖下摆缝制宽度 width of T-shirt hemming sewing	下摆缝制范围(周长) Hem sewing range (perimeter)	4000	1300x1024x1355mm
HSAT-K1A/LV	UY128GA	3	5	5.6	4.5	0.8-1.8	7mm	1.5-3.5cm	166cm	4000	1300x1024x1355mm
HSAT-K1A/S	UY128GA	3	5	5.6	4.5	0.8-1.8	7mm	1.5-3.5cm	166cm	4000	1300x1024x1355mm
HSAT-K1A/LV/S	UY128GA	3	5	5.6	4.5	0.8-1.8	7mm	1.5-3.5cm	166cm	4000	1300x1024x1355mm

HIKARI® 富山

上海富山精密机械科技有限公司

HIKARI(SHANGHAI)PRECISE MACHINERY SCIENCE & TECHNOLOGY CO.,LTD.

上海市金山区朱泾工业区中达路800号
NO.800.ZHONGDA ROAD, JINSHAN ZONE,
SHANGHAI, CHINA

电话/Tel:021-67311111
传真/Fax:021-67311311
邮箱/E-mail:hikari@chinahikari.com



facebook



抖音